



CERAMIC GLAZED ORDINARY FLOOR TILES

SIZE:- 300 X 300 MM



**TILES CARREAUX**



G-1003



**TILES CARREAUX**



G-3011



TILES CARREAUX



G-3037



**TILES CARREAUX**



G-3070



**TILES CARREAUX**



G-4011



**TILES CARREAUX**



G-4028



TILES CARREAUX




G-4036





TILES CARREAUX

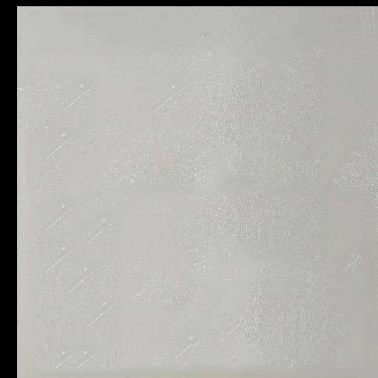

G-4051



**TILES CARREAUX**



G-4074



TILES CARREAUX



RENZO BLACK



**TILES CARREAUX**



**RENTO T. BLUE**



**TILES CARREAUX**



REF-205




TILES CARREAUX



P. IVORY




TILES CARREAUX



P. WHITE



TILES CARREAUX

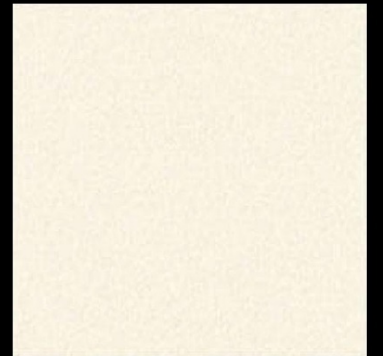

A.S. IVORY





TILES CARREAUX



A.S. WHITE

## Technical Specification



CHARACTERISTICS	EURO STANDARDS EN- 159/IS 13753	OUR GLAZED VALUE
<b>DIMENSION &amp; SURFACE QUALITY</b>		
1) Dimension & Surface Quality	±0.5%	±0.2%
2) Deviation in Thickness	±0.6mm	±0.2mm
3) Straightness of sides	±0.3%	±0.2%
4) Rectangularity	±0.5%	±0.3%
5) Surface Flatness	±0.5%	±0.3%
6) Surface Quality	Min 95%	Min 96%
<b>PHYSICAL PROPERTIES</b>		
1) Water Absorption	> 10%	14.17%
2) Bending Strength	>150 Kg/Cm <sup>2</sup>	200-250 Kg/Cm <sup>2</sup>
3) Scratch hardness (Mohs)	Min 3	Min 3
4) Crazeing	1 Cycle	No Crazeing at 5 Cycles
<b>CHEMICAL PROPERTIES</b>		
1) Staining Resistance	Min Class 2	Resistance to all Acids And Alkalies & Household Chemicals, except Hydro Flouric Acid
2) Household Chemical	Min Class B	
<b>THERMAL PROPERTIES</b>		
1) Thermal Shock	Resistant to 10 Cycles	CONFORMS
2) Thermal Expansion	Max-9E- 06	CONFORMS

### PACKING DETAILS

Size (mm) Approx.	Thickness (mm) Approx.	Tiles Per Box (Pcs)	Area Coverage Per Box (sq. m.) Approx.	Average Weight Per Box (Kgs.) Approx.
300x300mm	7.00mm	11 Pcs	0.99	11.200 kg.

### EXCLUSIVE APPLICATIONS



**Note. :** We also manufacture all these design in waterproof material.